

FIG. 1

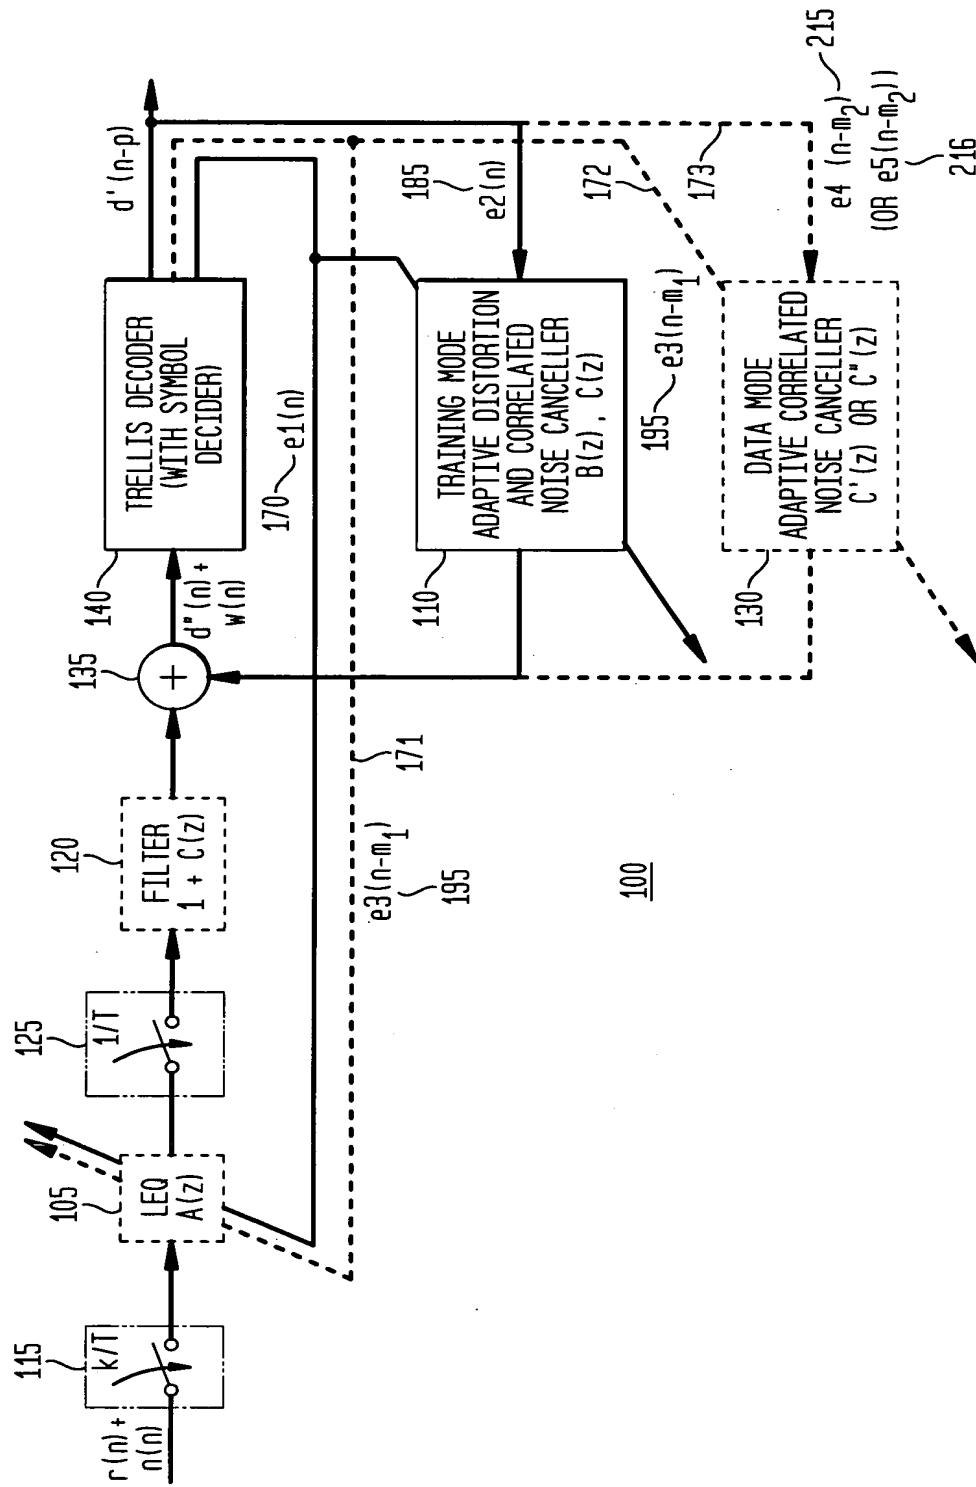


FIG. 2

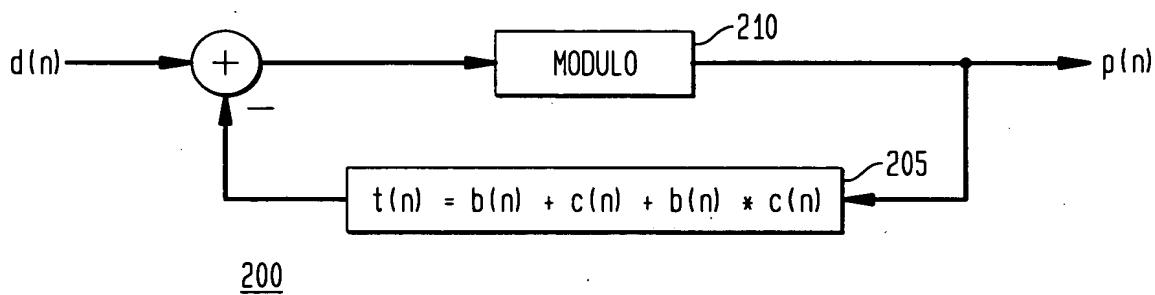


FIG. 3

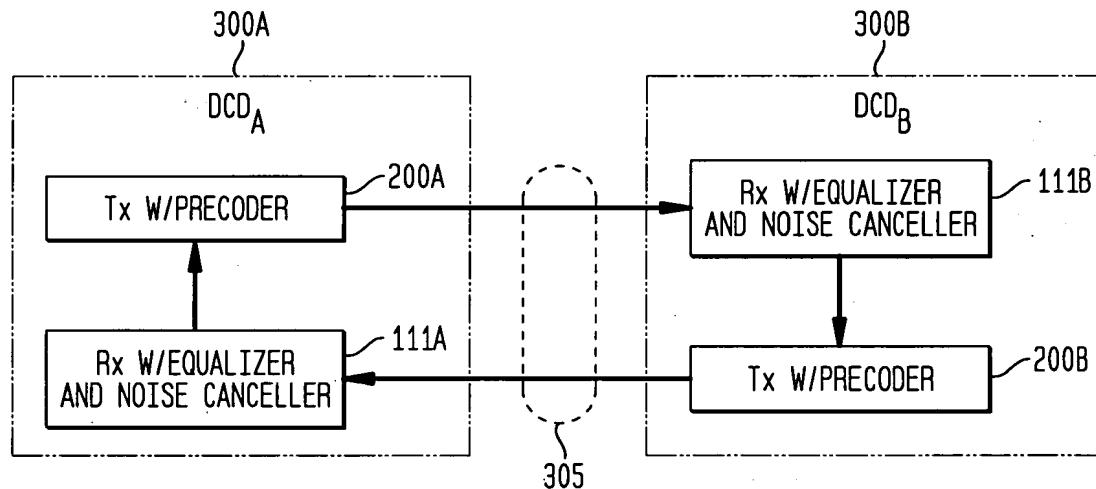


FIG. 4

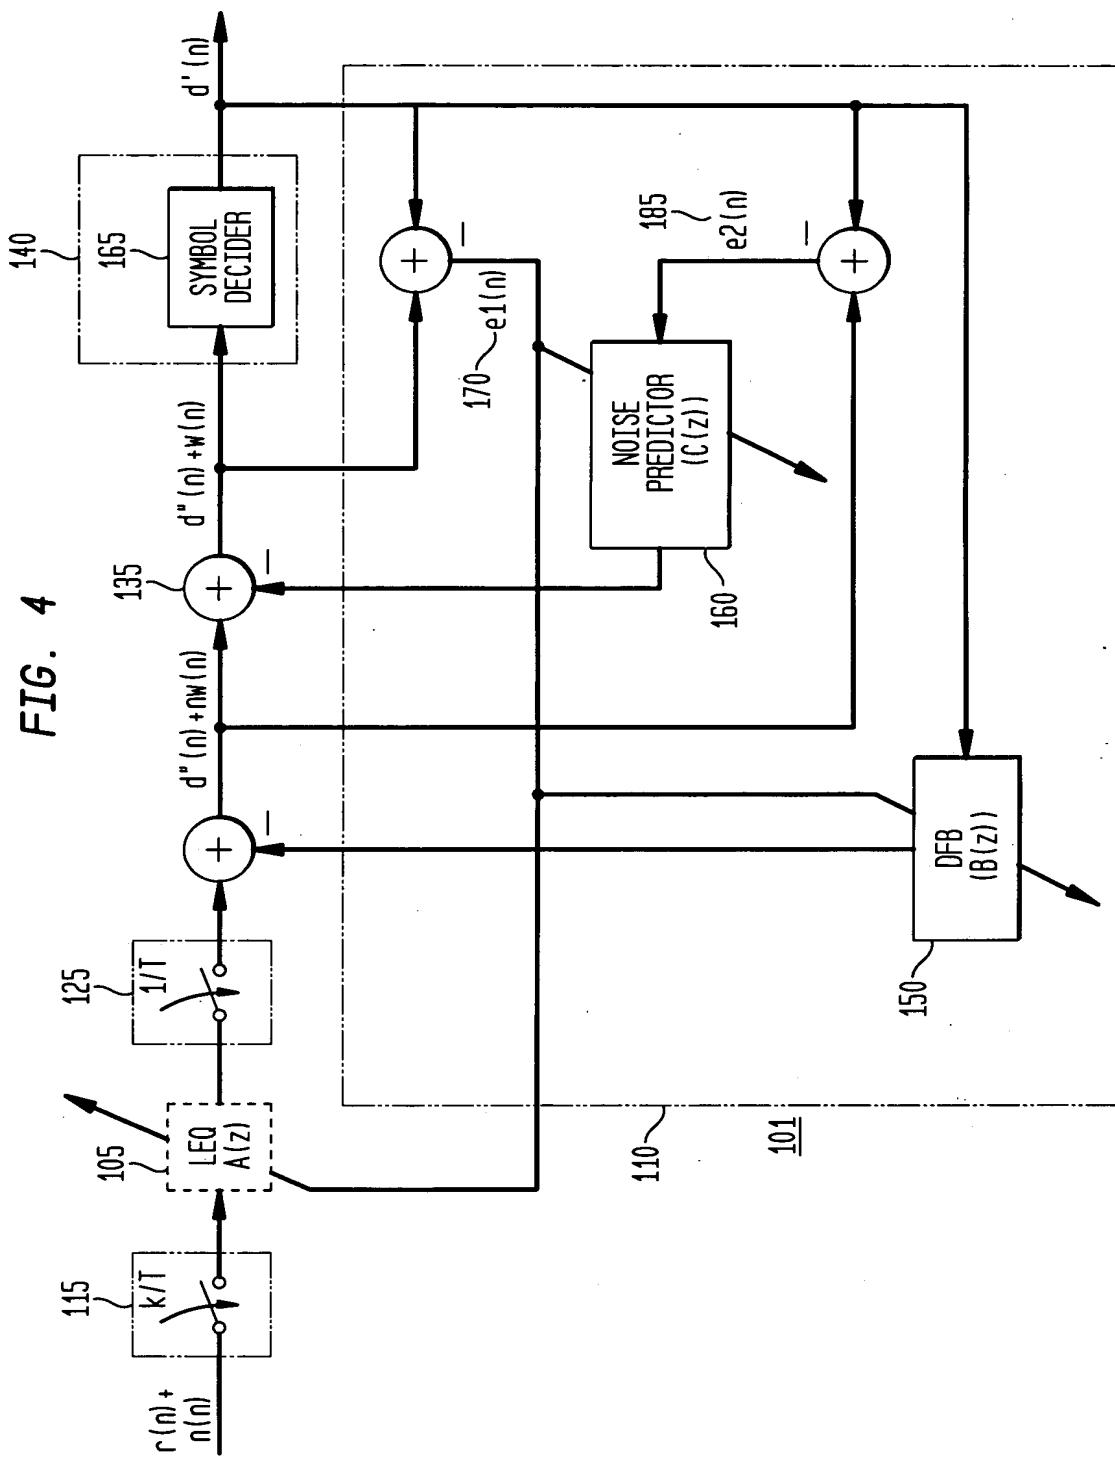


FIG. 5

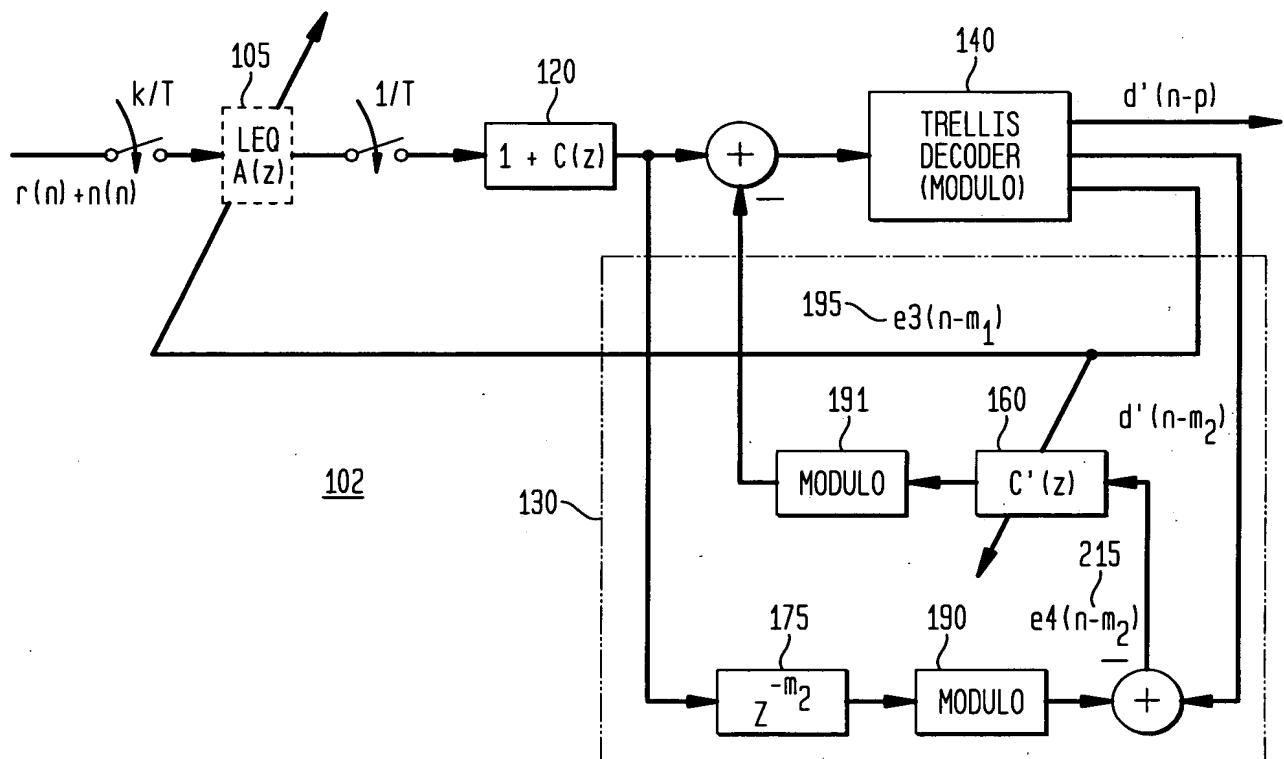


FIG. 6


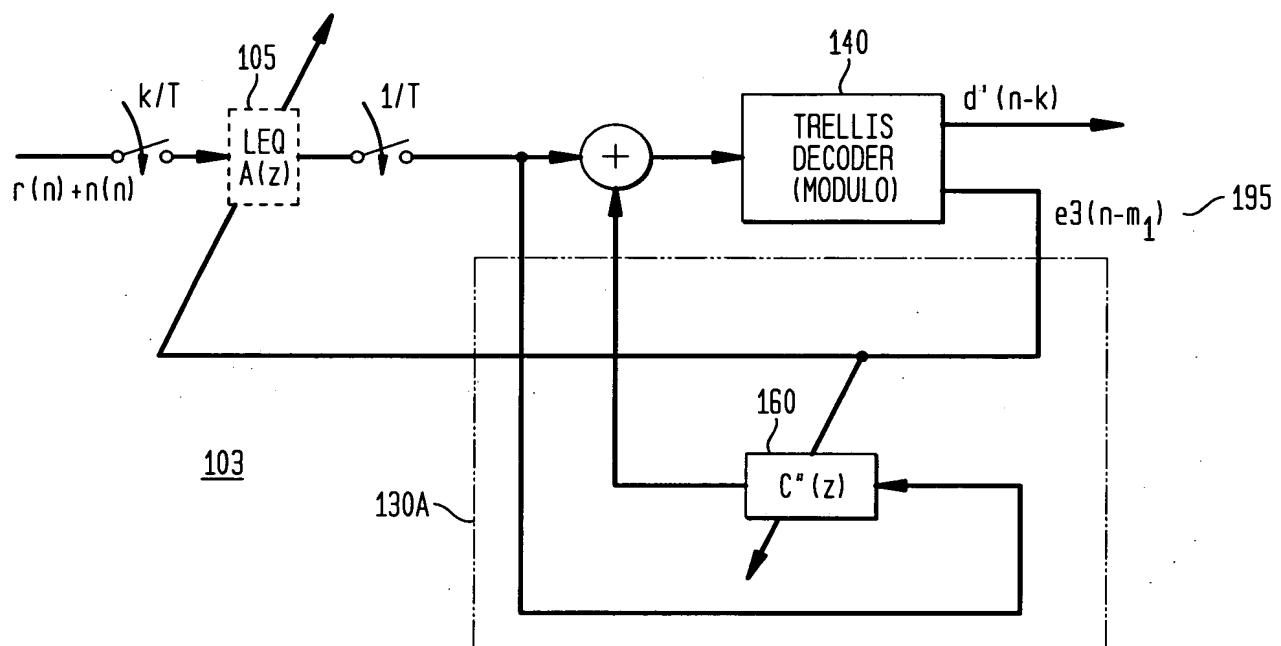


FIG. 7

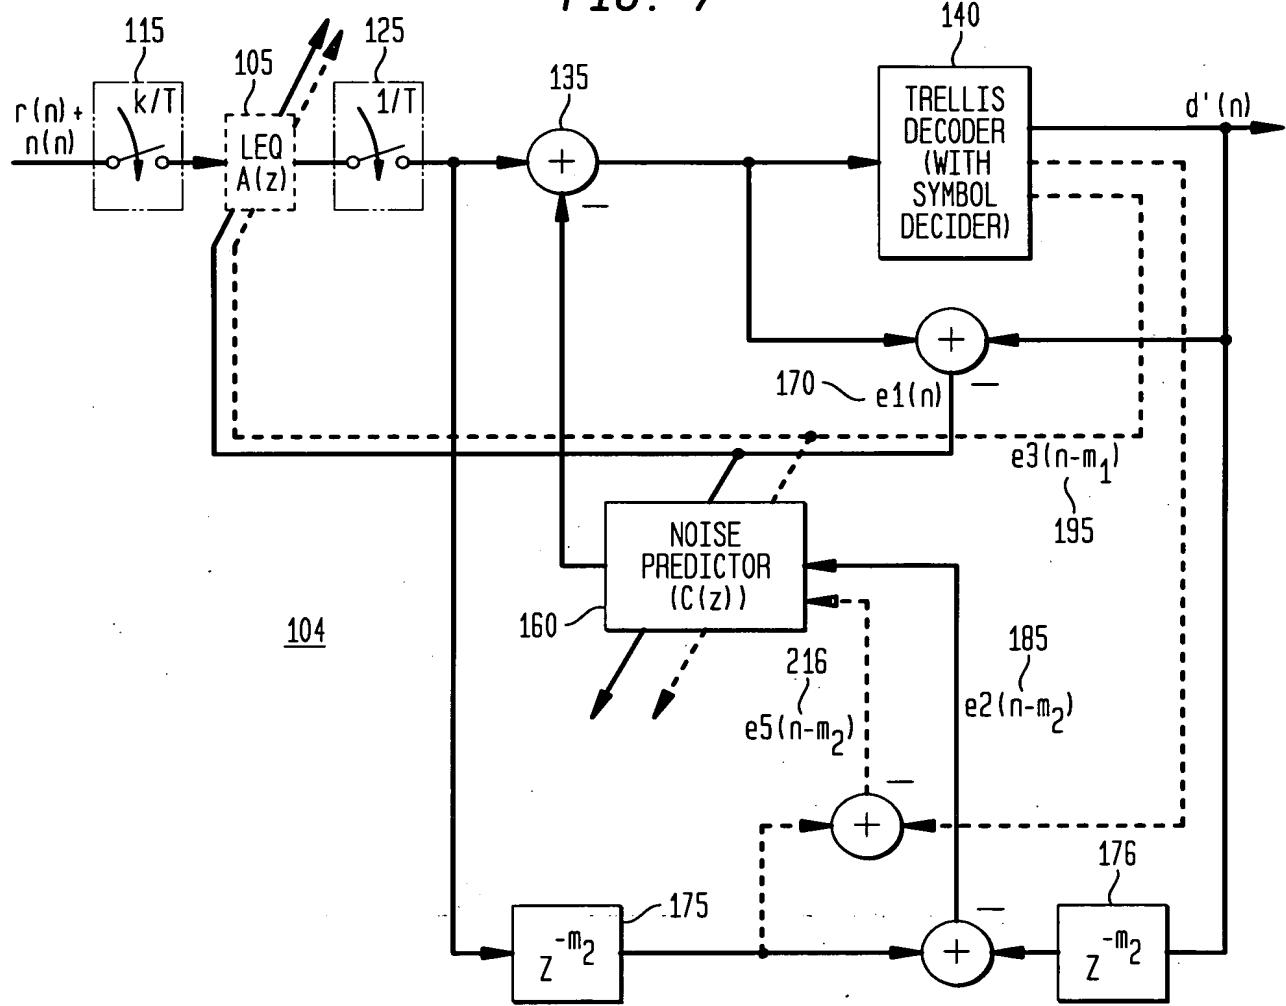

09261910 - DECODED

FIG. 8


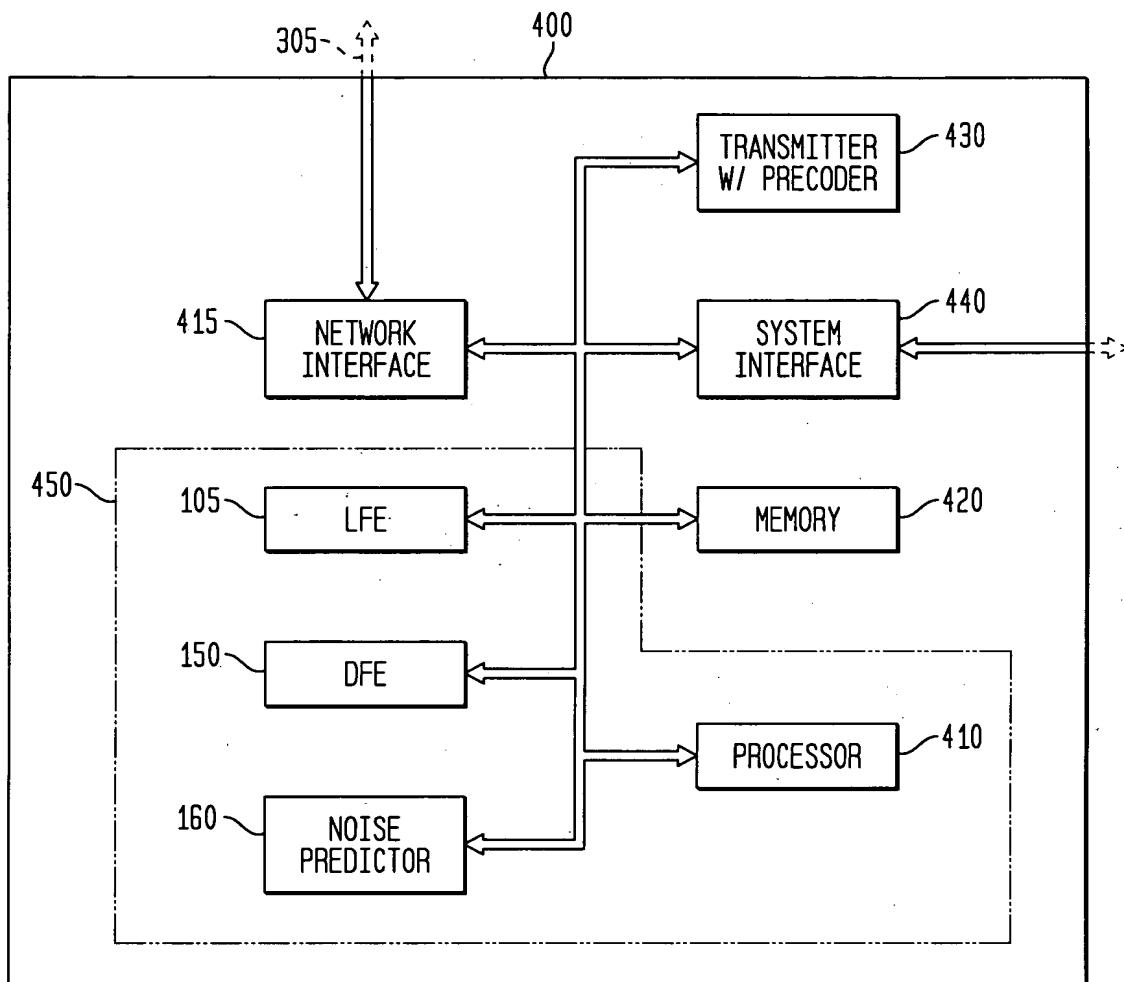


FIG. 9

START: RECEIVE TRAINING SIGNAL HAVING NOISE AND ISI 500

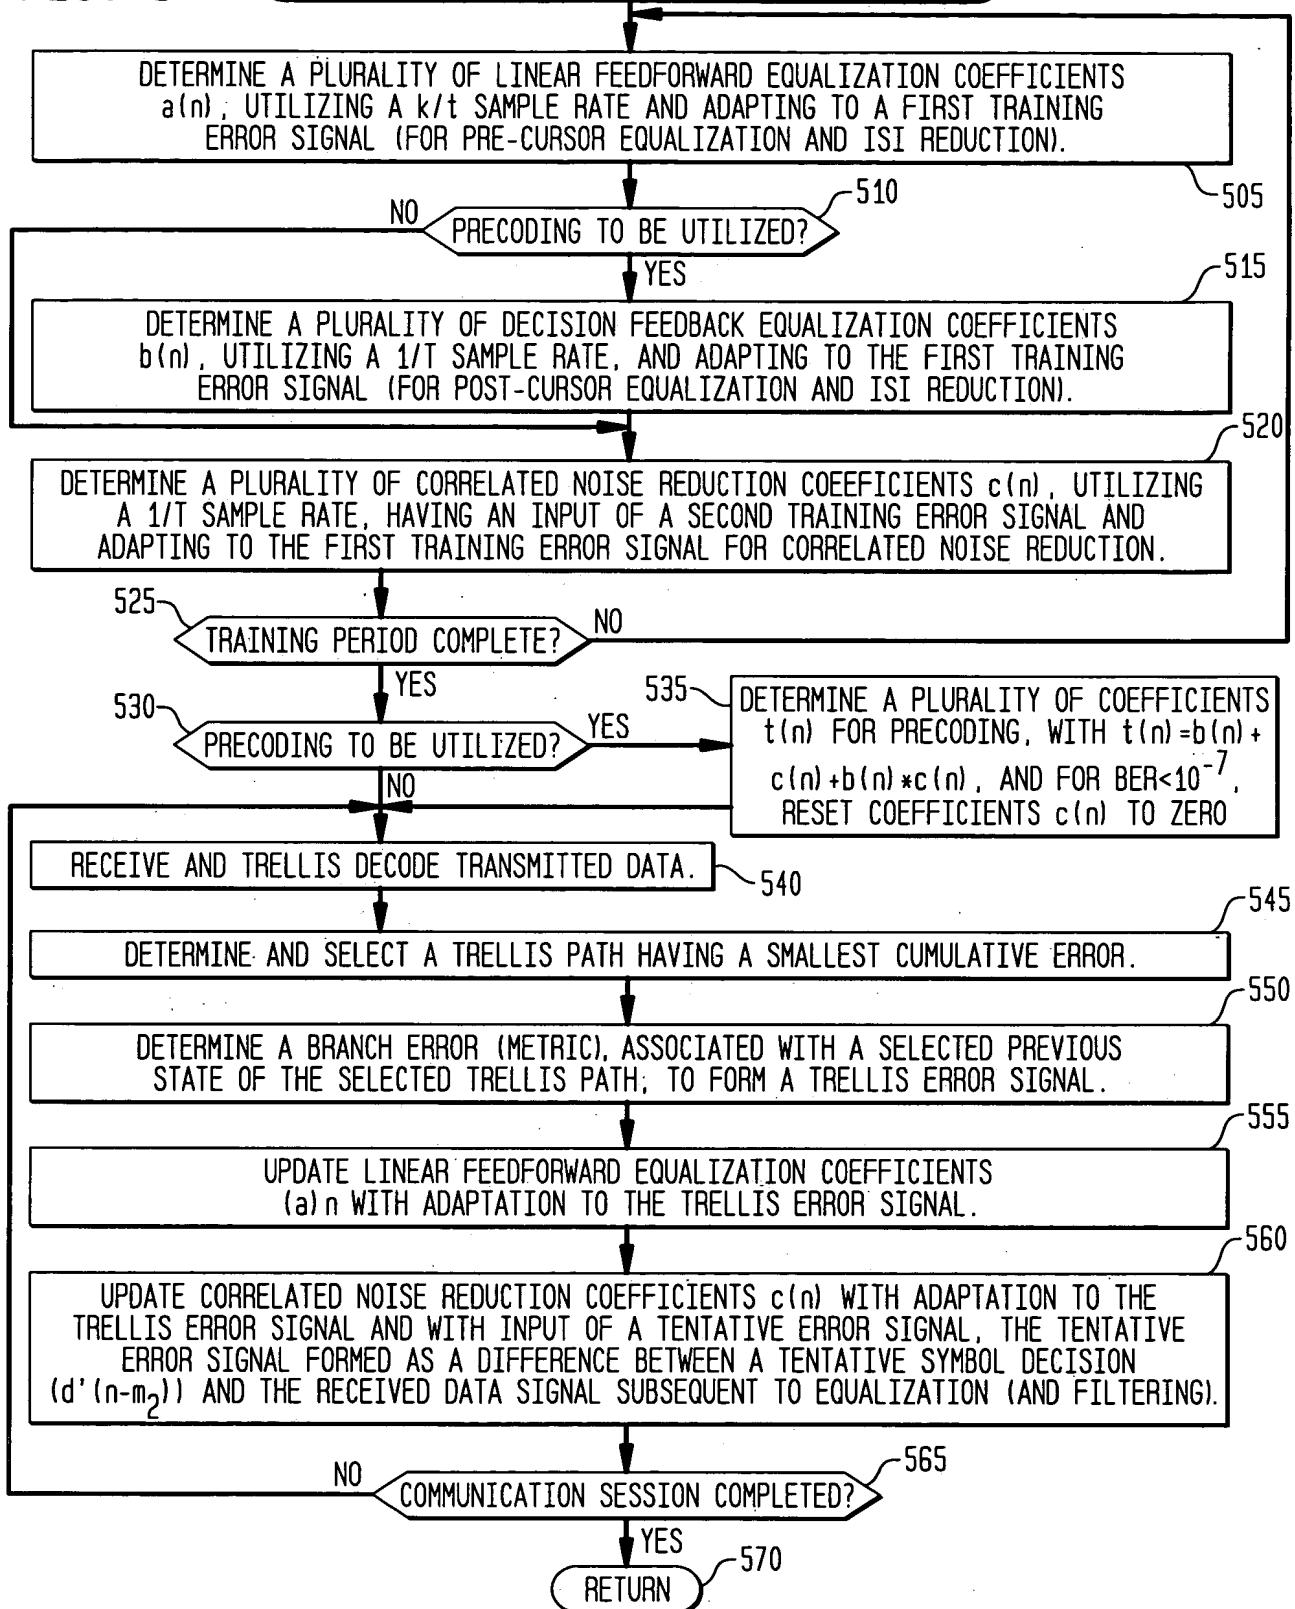

TOT0000-00T\$T9404

FIG. 10

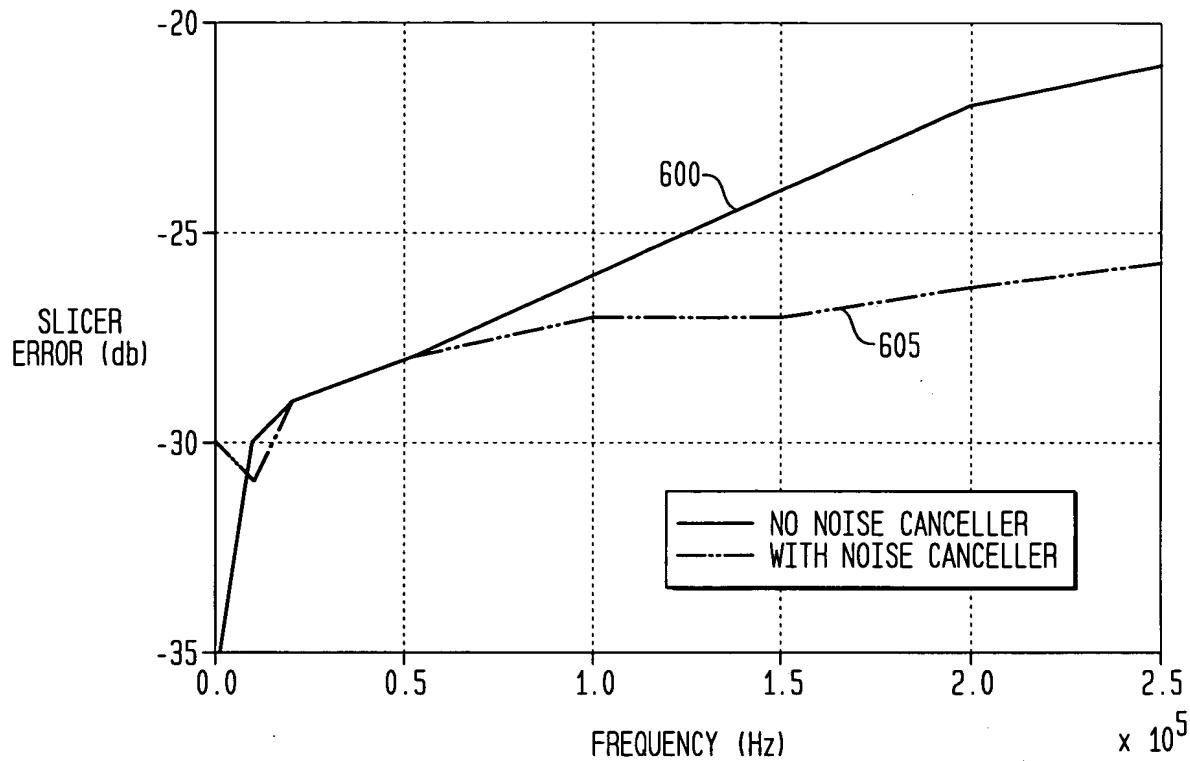


FIG. 11

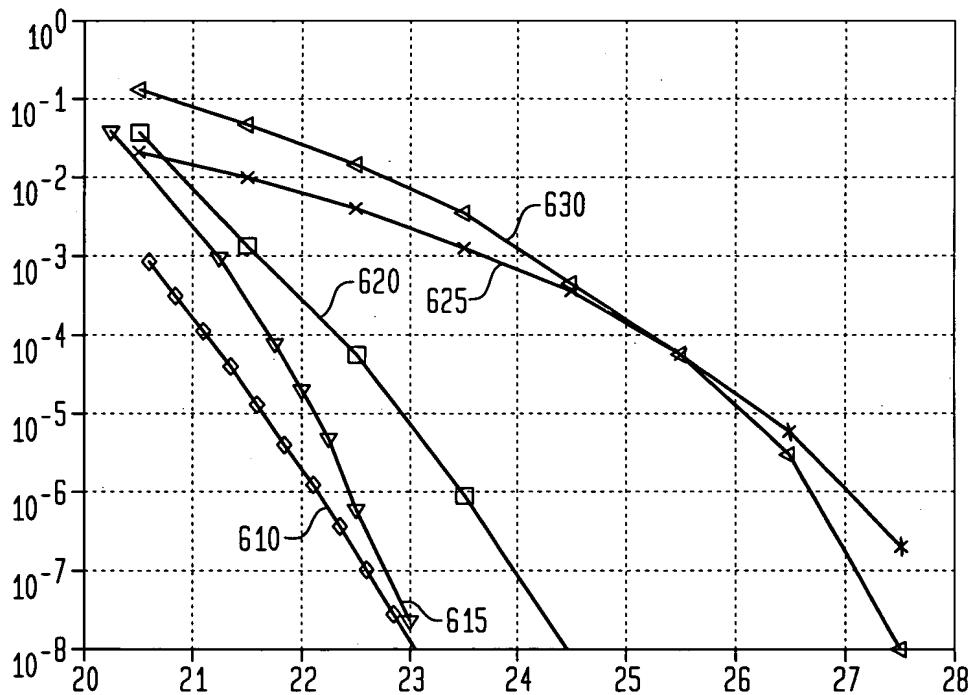


FIG. 12

CROSSTALK ENVIRONMENT	CORRELATION CANCELLER IMPROVED PERFORMANCE MARGIN (db)
24T1+24 HDSL2(C)	1.4
39 HDSL2(C)	1.5
24 ADSL+24 HDSL(C)	1.8
24 T1+24 HDSL2(R)	1.4